


Размеры

Одностороннего действия: выдвинут без давления

C85N \varnothing - Ход T -

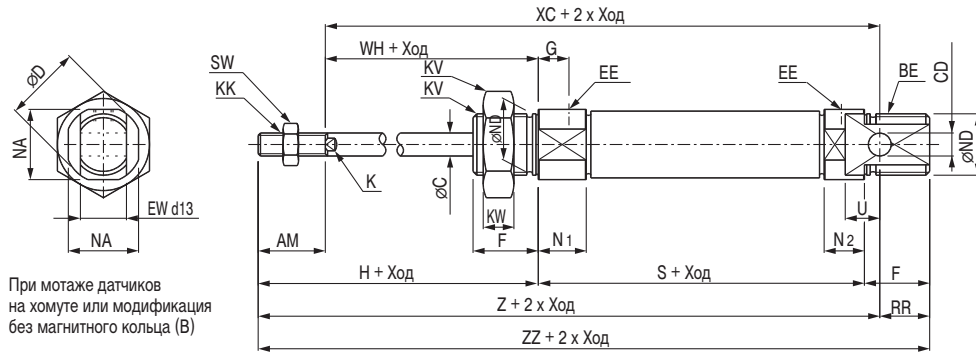

\varnothing порш.	AM	BE	$\varnothing C$	CD	$\varnothing D$	EE	EW	F	G	H	HR	K	KA	KK	KV	KW	N ₁	N ₂	NA	$\varnothing ND(h8)$	RR	SW	U	WH
8	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5	8	12	7	28	10	-	4.2	M4	19	6	11.5	9.5	15	12	10	7	6	16
10	12	M12 X 1.25	4	4 ^{+0.030} ₀	16.7	M5	8	12	7	28	10.5	-	4.2	M4	19	6	11.5	9.5	15	12	10	7	6	16
12	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5	12	17	8	38	14	5	6.2	M6	24	8	12.5	10.5	18	16	14	10	9	22
16	16	M16 X 1.5	6	6 ^{+0.030} ₀	19.7	M5	12	17	8	38	14	5	6.2	M6	24	8	12.5	10.5	18	16	13	10	9	22
20	20	M22 X 1.5	8	8 ^{+0.036} _{+0.006}	27.9	G1/8	16	20	8	44	17	6	8.2	M8	32	10	15	15	24	22	11	13	12	24
25	22	M22 X 1.5	10	8 ^{+0.036} _{+0.006}	33.4	G1/8	16	22	8	50	20	8	10.2	M10	32	10	15	15	30	22	11	17	12	28

\varnothing порш.	S			Z			XC			ZZ		
	1 - 50	51 - 100	101 - 150	1 - 50	51 - 100	101 - 150	1 - 50	51 - 100	101 - 150	1 - 50	51 - 100	101 - 150
8	64.5(70.5)	-	-	94.5(100.5)	-	-	82.5(88.5)	-	-	104.5(110.5)	-	-
10	64.5(68.5)	-	-	94.5(98.5)	-	-	82.5(86.5)	-	-	104.5(108.5)	-	-
12	70(73.5)	-	-	111(114.5)	-	-	95(98.5)	-	-	125(128.5)	-	-
16	75(78.5)	101(104.5)	127(130.5)	117(120.5)	143(146.5)	169(172.5)	101(104.5)	127(130.5)	153(156.5)	130(133.5)	156(159.5)	182(185.5)
20	87	112	137	140	165	190	120	145	170	151	176	201
25	88.5	113.5	138.5	149.5	174.5	199.5	127.5	152.5	177.5	160.5	185.5	210.5